




ACRYLIC SHEET / PMMA SHEET

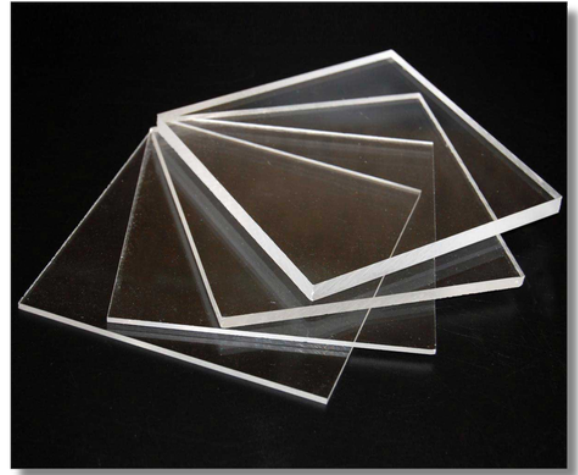

Introduction :

Acrylic (PMMA) Sheet has the best physical properties among plastics, the main component is polymethyl methacrylate, it is widely used in the building, advertisement and decoration.

Features :

1. Excellent transparency
2. Good mechanical performance
3. Good electrical insulation
4. Stable and durable
5. Non - toxic
6. Superior impact resistance
7. Crack resistance
8. Superior weather resistance
9. UV light resistance
10. Chemical resistance
11. Stable color under outdoor exposure

Applications :

1. Indoor decoration board, partition board in office and house
2. Engraving, signboard, and design
3. Making gift items
4. Making kitchen and sanitary application
5. Door and window cover



PVC FOAM SHEET

Technical Specifications :


ITEM	INDICATORS
Specific Gravity	1.20
Hardness	M-100
Absorptivity of Water (24h)	0.30%
Transmittancy (Parallel Rays)	92%
Transmittancy (Full Rays)	93%
Heat Distortion Temperature	100 °C
Coefficient of Linear Expansion	6×10^{-5} cm/cm °C
Ultimate Temperature of Continuous Operation	80 °C
Thermoforming Rangs	140-180 °C
Insulating Strength	20v / mm
Tension	
Coefficient of Rupture	700 kg/cm ²
Coefficient of Elasticity	28000 kg/cm ²
Bending	
Coefficient of Rupture	1.5 kg/cm ²
Coefficient of Elasticity	28000 kg/cm ²

Specifications :

Thickness (mm): 2 - 300

Dimensions (mm): 1050 x 2050, 1250 x 1850, 1250 x 2450, 2050 x 3050, 3000 x 6000

Color: clear, milky, opal, black, red, blue, yellow and green

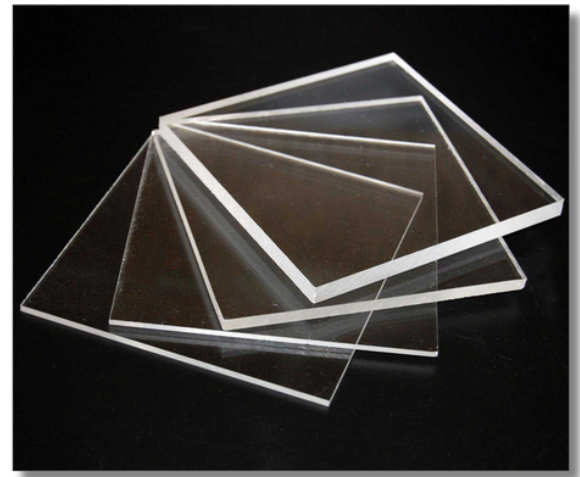

PLANCHA ACRÍLICA / PLANCHA PMMA

Introducción :

Acrílico (PMMA) Hoja tiene las mejores propiedades físicas entre los plásticos, el componente principal es el metacrilato de polimetilo, es ampliamente utilizado en la construcción, anuncios y decoración.

Características :

1. Excelente transparencia
2. Buenas prestaciones mecánicas
3. Buen aislamiento eléctrico
4. Estable y duradero
5. No tóxico
6. Resistencia superior al impacto
7. Resistencia a las grietas
8. Resistencia superior a la intemperie
9. Resistencia a la luz UV
10. Resistencia química
11. Color estable en exteriores

Aplicaciones :

1. Tablero decorativo para interiores, tablero divisorio en oficinas y viviendas
2. Grabado, rotulación y diseño
3. Fabricación de artículos de regalo
4. Aplicaciones sanitarias y de cocina
5. Revestimiento de puertas y ventanas



PLANCHA ACRÍLICA / PLANCHA PMMA

Ficha Técnica :

ITEM	INDICATORS
Specific Gravity	1.20
Hardness	M-100
Absorptivity of Water (24h)	0.30%
Transmittancy (Parallel Rays)	92%
Transmittancy (Full Rays)	93%
Heat Distortion Temperature	100 °C
Coefficient of Linear Expansion	$6 \cdot 10^{-5}$ cm/cm °C
Ultimate Temperature of Continuous Operation	80 °C
Thermoforming Rangs	140-180 °C
Insulating Strength	20v / mm
Tension	
Coefficient of Rupture	700 kg/cm ²
Coefficient of Elasticity	28000 kg/cm ²
Bending	
Coefficient of Rupture	1.5 kg/cm ²
Coefficient of Elasticity	28000 kg/cm ²

Especificaciones :

Espesor (mm): 2 - 300

Dimensiones (mm): 1050 x 2050, 1250 x 1850, 1250 x 2450, 2050 x 3050, 3000 x 6000

Color: transparente, lechoso, opalino, negro, rojo, azul, amarillo y verde